

**advanced FLOW engineering**

**Instruction Manual** P/N: 51-11902-1/54-11902-1/75-11902-1/75-11902-1V/  
51-11902-1P/54-11902-1P

---

Make: **Ford** Model: **F-150 SVT Raptor** Year: **2010-2012** Engine: **V8-6.2L**

Make: **Ford** Model: **F-150** Year: **11-12** Engine: **V8-6.2L**



- Please read the entire instruction manual before proceeding.
- Ensure all components listed are present.
- If you are missing any of the components, call customer support at 951-493-7100.
- Ensure you have all necessary tools before proceeding.
- Do not attempt to work on your vehicle when the engine is hot.
- Disconnect the negative battery terminal before proceeding.
- Retain factory parts for future use.

Label	Qty.	Description	Part Number
A1	1	Pro DRY S Air Filter	21-91040 (Gray Media)
A2	1	Pro 5R Air Filter	24-91040 (Blue Media)
A3	1	Pro GUARD 7 Air Filter	72-91040 (Gold Media)
B	1	Housing	05-01024
C	1	Tube	05-11902B1 (Black)
C	1	Tube	05-11902P1 (Polished) 51/54-11902-P ONLY
D	1	Seal Trim - 23"	05-00072
E	1	Adaptor	05-00611
F	1	Elbow Coupling	05-00464
G	1	Hump Coupling	05-00565
H	1	5/8" Fuel Hose - 18"	05-00069
I	1	3/8" Fuel Hose - 24"	05-00110
J	3	Clamp #56	03-50009
K	1	Clamp #64	03-50006
L	1	Isolation Mount	03-50022
M	1	Flat Washer	03-50043
N	1	Hex Nut	03-50059
O	5	Button Head Screw	03-50102
P	1	Restore Kit	90-50500 (75-11902-0V ONLY)
Q	1	Pre-Filter	28-10041 (75-11902-0V ONLY)
R	2	M4 x.7x8 Screws	03-50034

Installation will require the following tools:

Flat head screw driver, Phillips screw driver, 8mm socket, 10mm socket, Ratchet & 5/16 nut driver.

Note: Legal in California for use on race vehicles only. The use of this device on vehicles used on public streets or highways is strictly prohibited in California and others states that have adopted California emission regulations.





### **Refer to Figure A**

- Step 1. View of complete stock intake.
- Step 2. Disconnect the wiring harness from the MAF sensor.
- Step 3. Loosen the clamp securing the intake tube to the plenum.
- Step 4. Disconnect the crankcase vent tubes from the intake tube.
- Step 5. Unclip the upper airbox from the lower airbox.
- Step 6. Remove the intake tube, upper airbox and air filter. Also remove the middle clip from the stock air box as it will not be needed.



Figure B

**Refer to Figure B**

Step 7. Loosen the clamp securing the plenum to the throttle body.

Step 8. Remove the plenum mounting bolts.



**Figure C****Refer to Figure C**

Step 9. Attach the filter adaptor (E) to the air filter housing (B) using the supplied button head Screws (C).

Step 10. Install the aFe air filter (A) and clamp onto the filter adaptor. (do not tighten)

Step 11. Install elbow coupler (F) and clamps (K) and (J) onto the filter adaptor. (do not tighten)

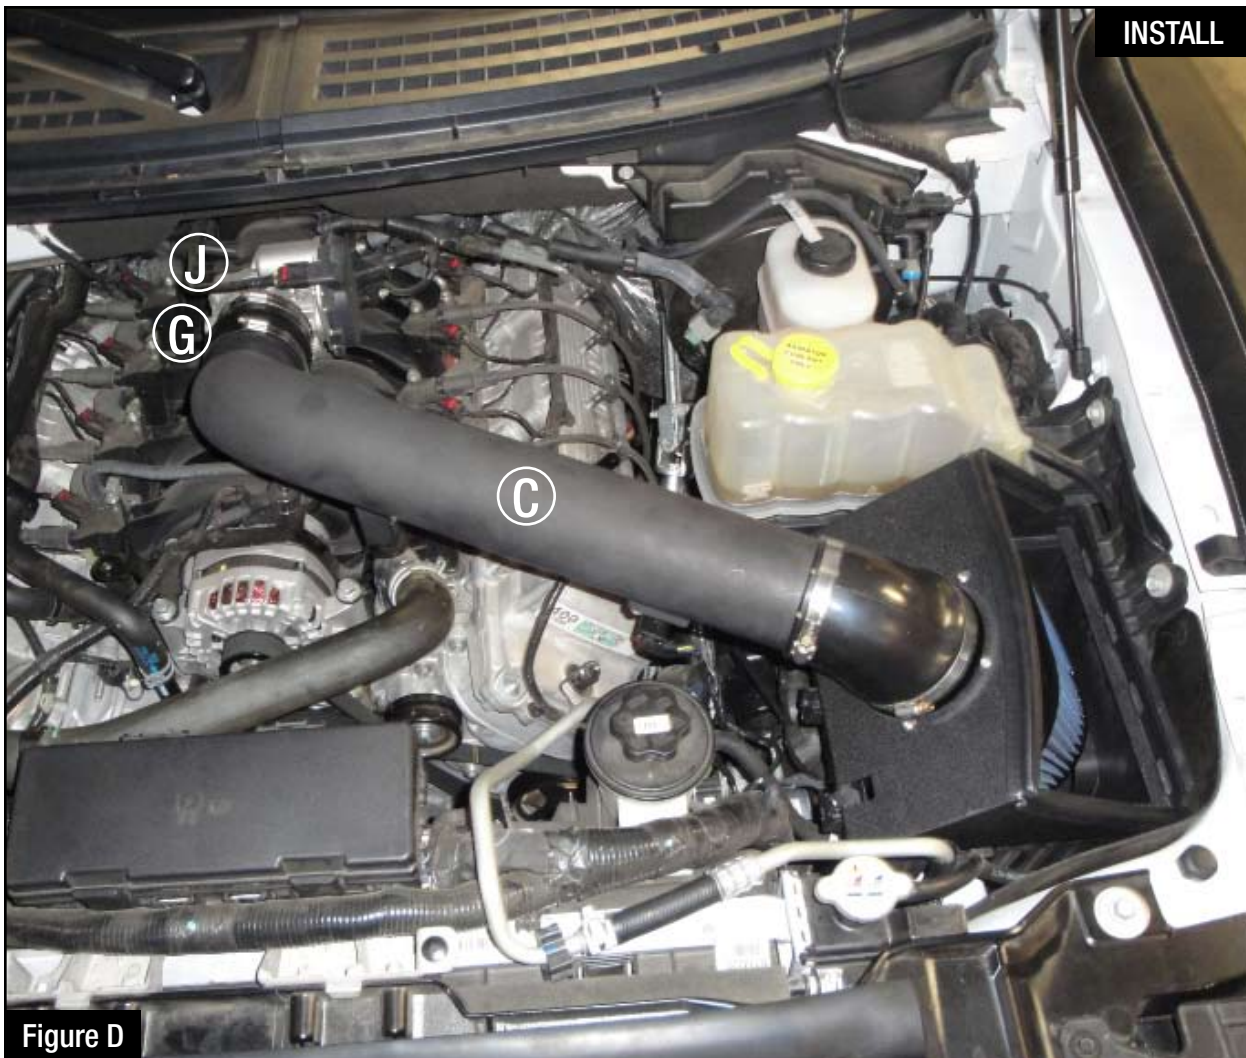


Figure D

**Refer to Figure D**

- Step 12. Install the Hump coupling (G) and clamps (J) on the throttle body.
- Step 13. Remove the MAF sensor from the stock intake tube and install on the aFe intake tube (C) using the stock screws.
- Step 14. Install the air filter housing assembly in the lower airbox and secure using the stock front and rear clips only.
- Step 15. Install the aFe intake tube in the elbow coupler first followed by the throttle body coupler.

**Figure E****Refer to Figure E**

Step 16. Install the isolation mount (L) .

Step 17. Fine tune the alignment of the intake tube by rotating both the intake tube and elbow coupler and tighten the clamps.

Step 18. Secure the intake tube using the supplied nut (N) and washer (M) on the isolation mount.





Figure F

**Refer to Figure F**

Step 19. Replace the stock crankcase vent tubes with the supplied hoses (H) and (I).



**Refer to Figure G**

Step 20: Connect the wiring harness to the MAF sensor.

Step 21: Tighten air filter with a nut driver. Be sure not to over tighten or you can damage the filter base. Installation is now complete.

Page left blank intentionally



Page left blank intentionally



Page left blank intentionally



Pro DRY S Air Filter



P/N: 21-91040

Pro 5R Air Filter



P/N: 24-91040

Pro GUARD 7 Air Filter



P/N: 72-91040

Pro DRY S Restore Kit



P/N: 90-59999

Gold Aerosol Restore Kit



P/N: 90-50000

Blue Aerosol Restore Kit



P/N: 90-50001

Gold Squeeze Restore Kit



P/N: 90-50500

Blue Squeeze Restore Kit



P/N: 90-50501

aFe Key Chain



P/N: 40-10103

aFe Power Hat



P/N: 40-10083

To purchase any of the items above, view airflow charts, dyno graphs, photos, and video; please go to [aFepower.com](http://aFepower.com).


# Warranty

## General Terms:

- aFe warrants their products to be free from manufacturer's defects due to workmanship and material.
- This warranty applies only to the original purchaser of the product and is non-transferrable.
- Proof of purchase of the aFe product is required for all warranty claims.
- Warranty is valid provided aFe instructions for installation and/or cleaning were properly followed.
- Proper maintenance with regular inspections of product is required to insure warranty coverage.
- Damage due to improper installation, abuse, unauthorized repair or alteration is not warranted.
- Incidental or consequential damages or cost, including installation and removal of part, incurred due to failure of aFe product is not covered under this warranty.
- All warranty is limited to the repair and/or replacement of the aFe part. To request Return Goods Authorization ("RGA"), email [RGA@afepower.com](mailto:RGA@afepower.com) or call (951)493-7100. Upon receipt of the RGA, you must return the product to the address provided in the RGA, freight prepaid and accompanied with a dated proof of purchase and the RGA. Upon receipt of the defective product and upon verification of proof of purchase, aFe will either repair or replace the defective product within a reasonable time, not to exceed thirty days.

<b>Product Category</b>	<b>P/N Prefix</b>	<b>Warranty duration</b>
Direct OE Replacement Filters	10, 11, 30, 31, 71, 73	Life of the vehicle
Racing Filters	18	1 year
Universal	21, 24, 72, TF	2 years
Air Intake Systems	50, 51, 54, 55, 75, TR, TA, TL	2 years
Exhaust Systems	49	2 years
Intercoolers & Intercooler Tubes	46-2	2 years
Intake Manifolds	46-1	2 years
Differential Cover	46-7	Life of the vehicle
Exhaust Manifolds	46	2 years
Throttle Body Spacers	46-3	2 years
Fluid Filters	44	90 days
Pre-Filters	28	2 years
Heavy Duty OE Replacement	70	2 years
PowerSports OE Replacement	81, 87	2 years
PowerSports Intake Systems	85	2 years

No other warranty expressed or implied applies nor is any person or advanced FLOW engineering authorized to assume any other warranty. Some States do not allow the exclusion or limitation of incidental or consequential damages or do not allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.

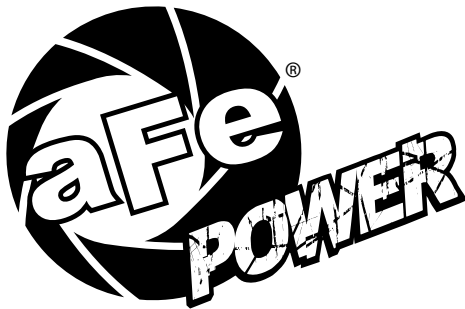

**advanced FLOW engineering, inc.**  
252 Granite Street Corona, CA 92879  
TEL: 951.493.7100 • TECH: 951.493.7100 x23  
E-Mail: [Tech@aFepower.com](mailto:Tech@aFepower.com)