

## Install guide for Group 15: Audi C8 RS6/7

Last updated 27/07/2021


Use subject to terms and conditions posted at <https://burgertuning.com/pages/terms>

THIS PART IS LEGAL FOR USE ONLY IN COMPETITION RACING VEHICLES AS DEFINED UNDER CALIFORNIA LAW AND IS NOT LEGAL FOR USE IN ANY OTHER MOTOR VEHICLE. California law defines a "racing vehicle" as "a competition vehicle not used on public highways." (Calif. Health & Safety Code 39048) This part may only be used on competition racing vehicles operated exclusively on a closed course in conjunction with a sanctioned racing event. Competition - only motor vehicles may not be driven to a racing event on a public highway and must be transported on a trailer or other carrier. USE OF THIS PART IN ANY OTHER VEHICLE MAY SUBJECT YOU TO FINES AND PENALTIES FOR VIOLATION OF FEDERAL AND/OR STATE LAW, WILL VOID YOUR WARRANTY FROM BURGER MOTORSPORTS, INC, AND CAN VOID YOUR VEHICLE'S WARRANTY. It is your responsibility to comply with all applicable federal and state laws relating to the use of this part, and Burger Motorsports, INC hereby disclaims any liability resulting from the failure to use this part in compliance with all applicable federal and state laws.





## Engine bay sensor locations:

There are four sensors we will connect to in the engine bay. The stock plug is removed from the sensor and plugged into the JB4 harness and the JB4 plug will go into the sensor.

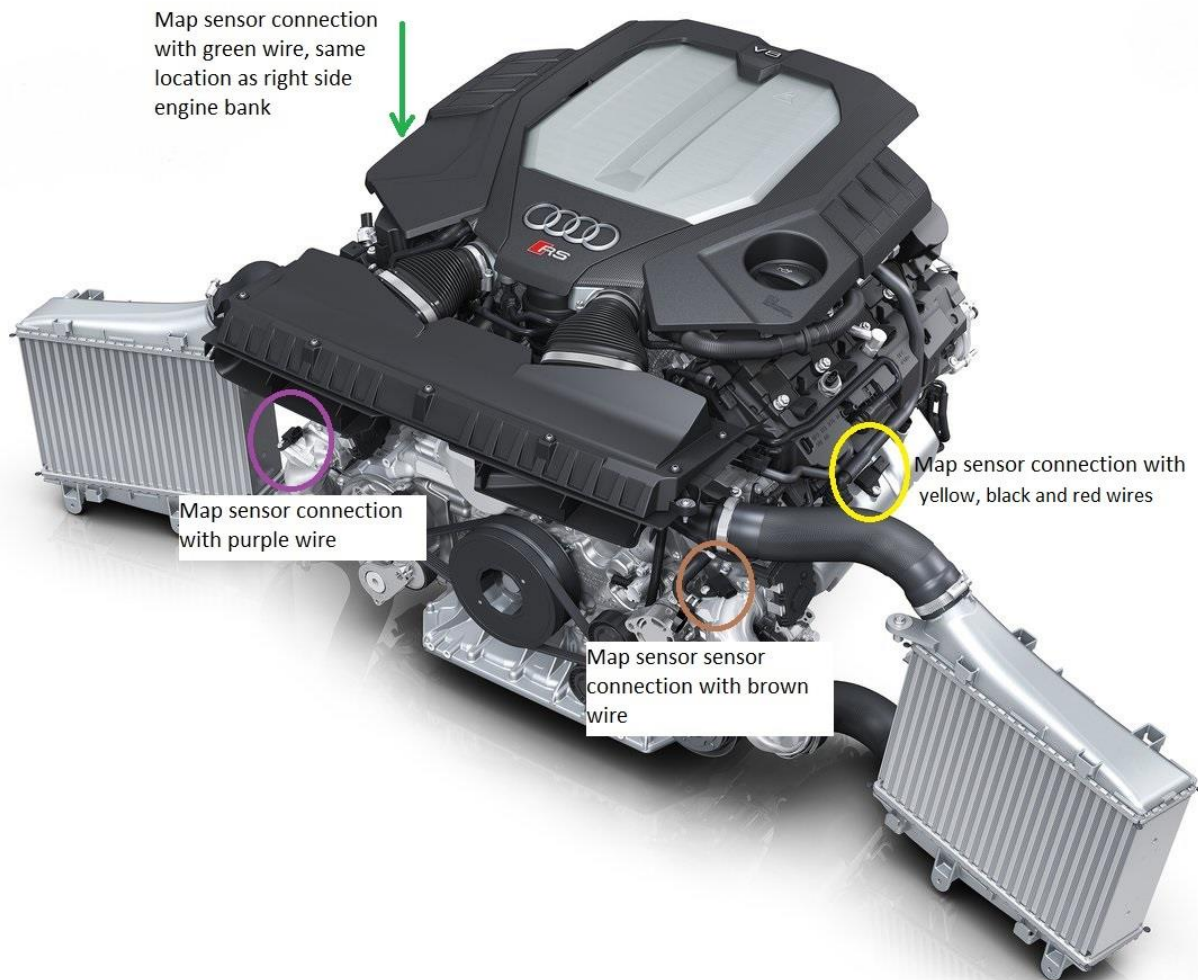

Prior to starting with the installation of the sensors some components need to be removed.

Remove two intake snorkles circled in yellow using a flat screw driver  
Next remove the covers above the lights circled in green. This will expose two T30 Torx screws that hold the Airbox in place, the locations is circled in red. Remove those and lift airbox circled in blue out.

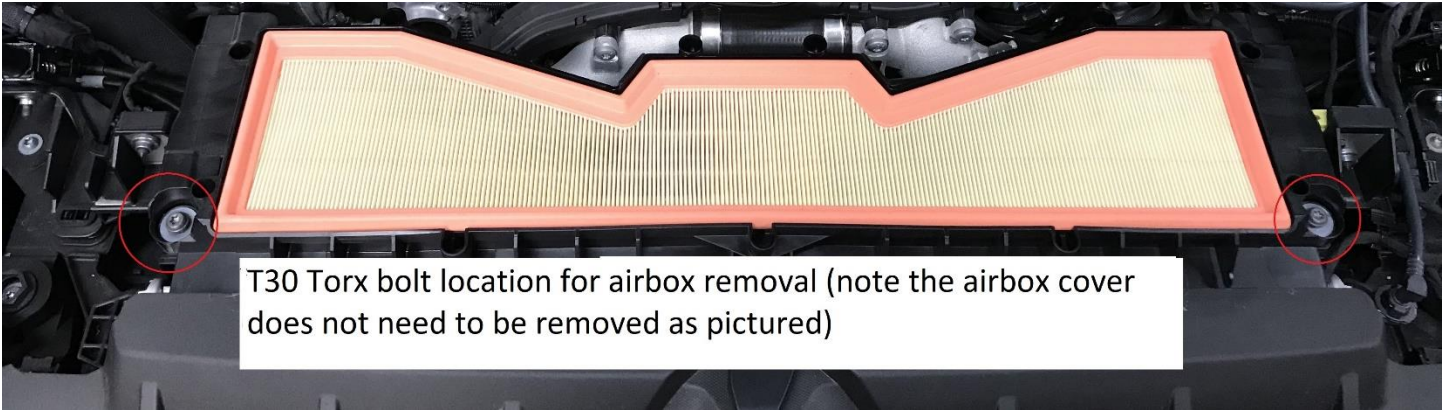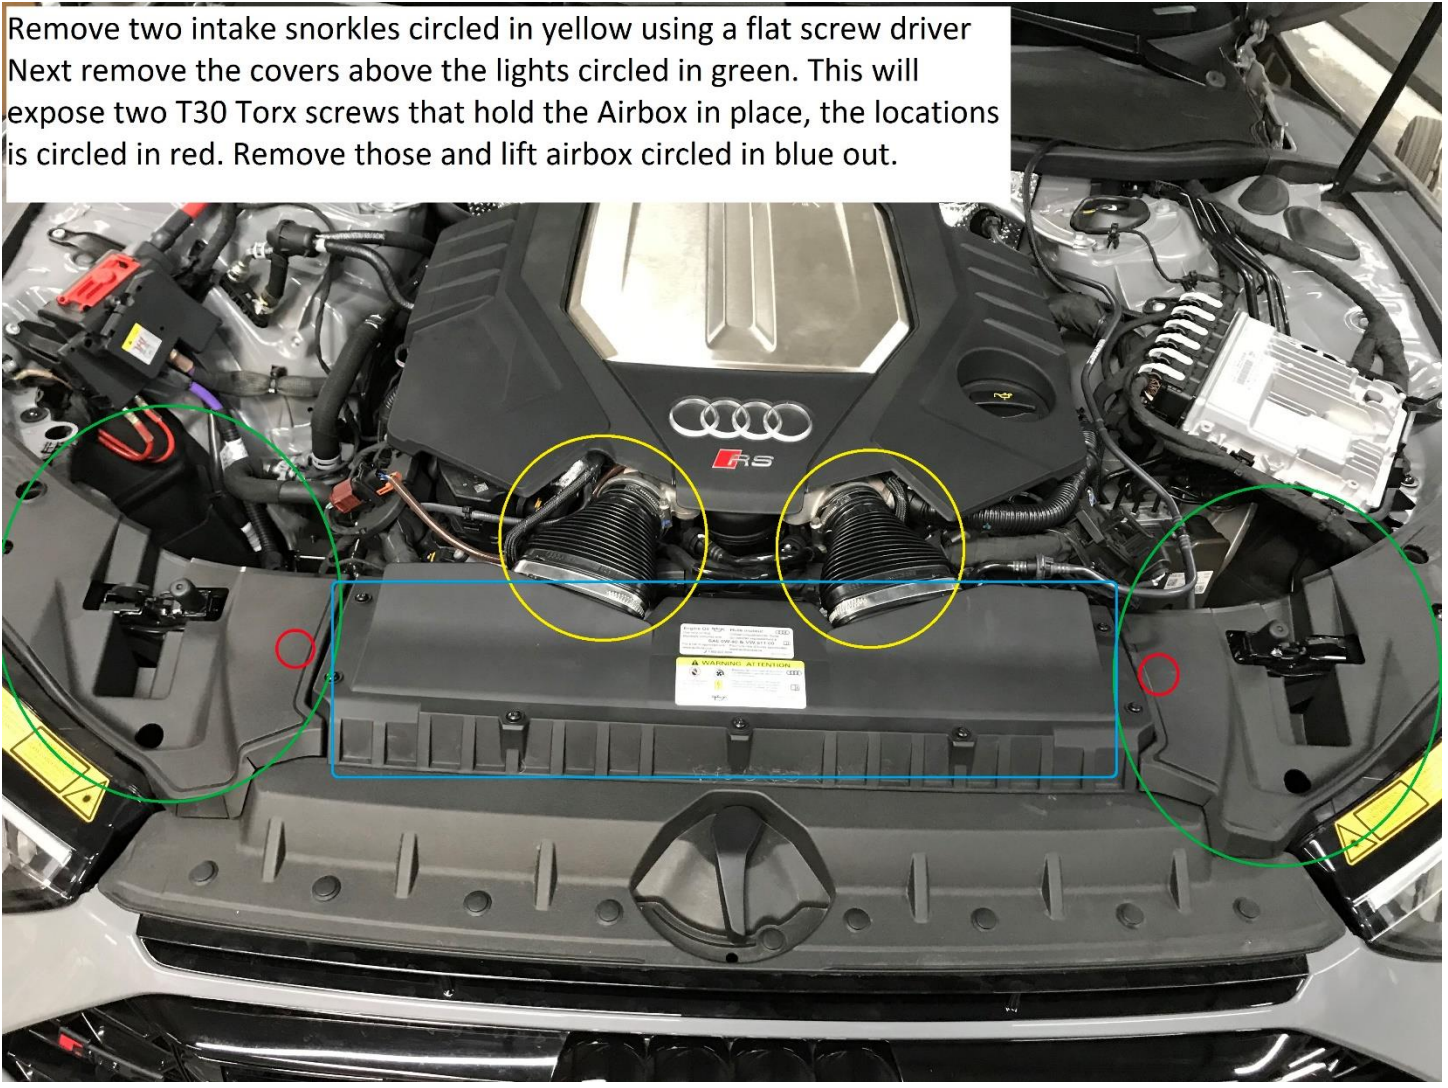


T30 Torx bolt location for airbox removal (note the airbox cover does not need to be removed as pictured)

At this stage we are ready to start installing the sensors. It is advisable to do the install with a cold engine. With the hood open lock the car and move the key far from the car and wait for 5 minutes so the vehicle can power down.

## Sensor A: Multi colour boost sensor plug

The sensor is found on the right hand side of the engine bay (driver side for a left hand drive car). The sensor plug is removed by pulling back on the red locking tab till it reaches the unlock position and then pressing down. It helps to push the plug in to the sensor when pressing down to unclip it. Install the multi colour plug, it is the one with the yellow, black and red wires into the sensors and the original plug into the JB4 harness at the same location pushing the grey locking tab forward. (if you cannot get it unclipped try the left hand side of the motor sensor which has the same clip and is easy to reach to understand the mechanism.

This plug is hard to reach so lift up on the ABS pump which is held by two grommets and push it a bit aside.

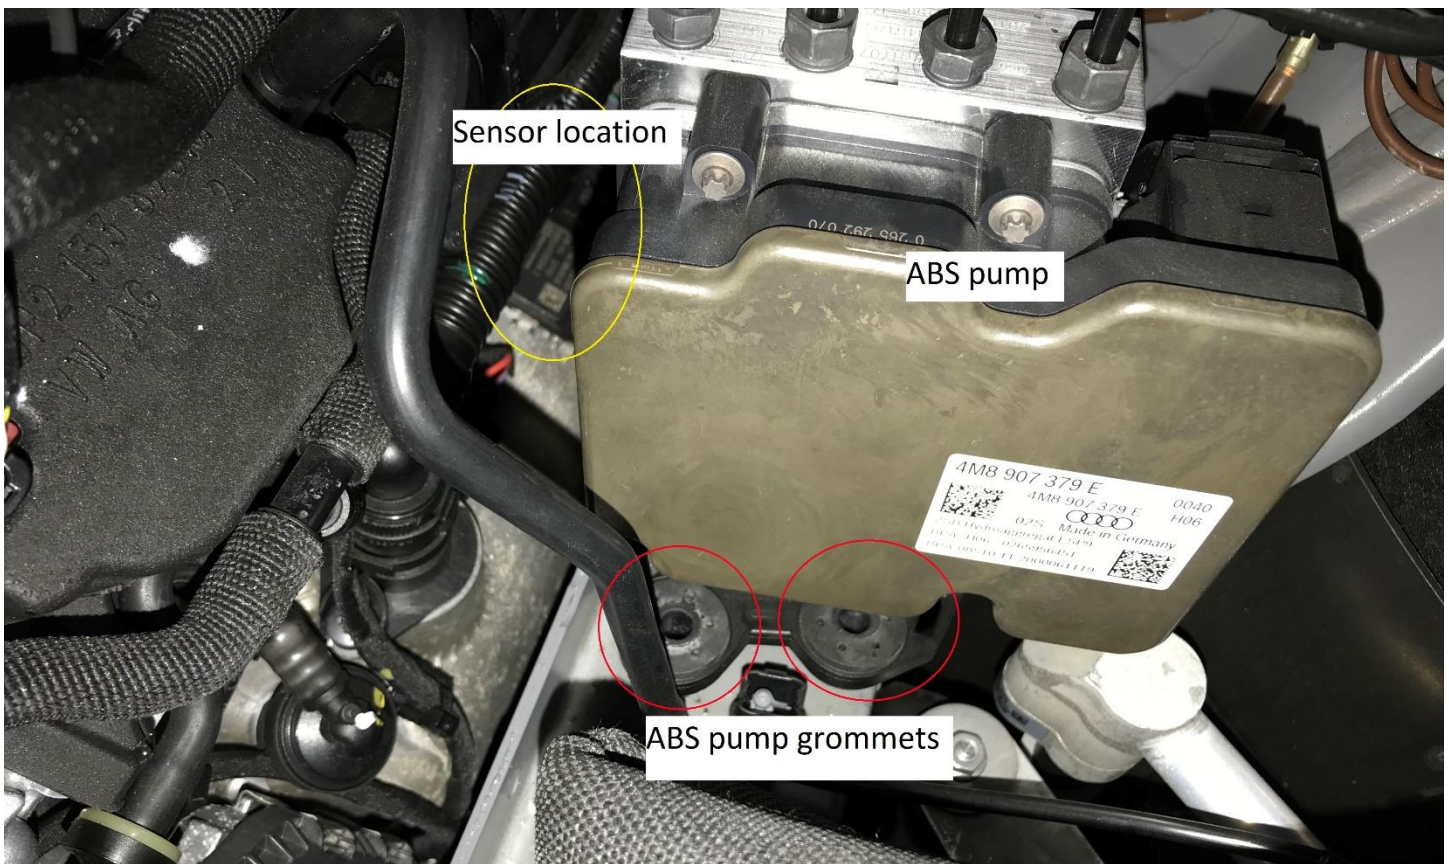







## Sensor B: Brown wired boost sensor plug

This sensor is located in the front right of the engine bay and the plug with the black and brown wire connects to it. To reach it the charge pipe will need to be removed by removing the clamp with a flat screwdriver and pushed out the way.

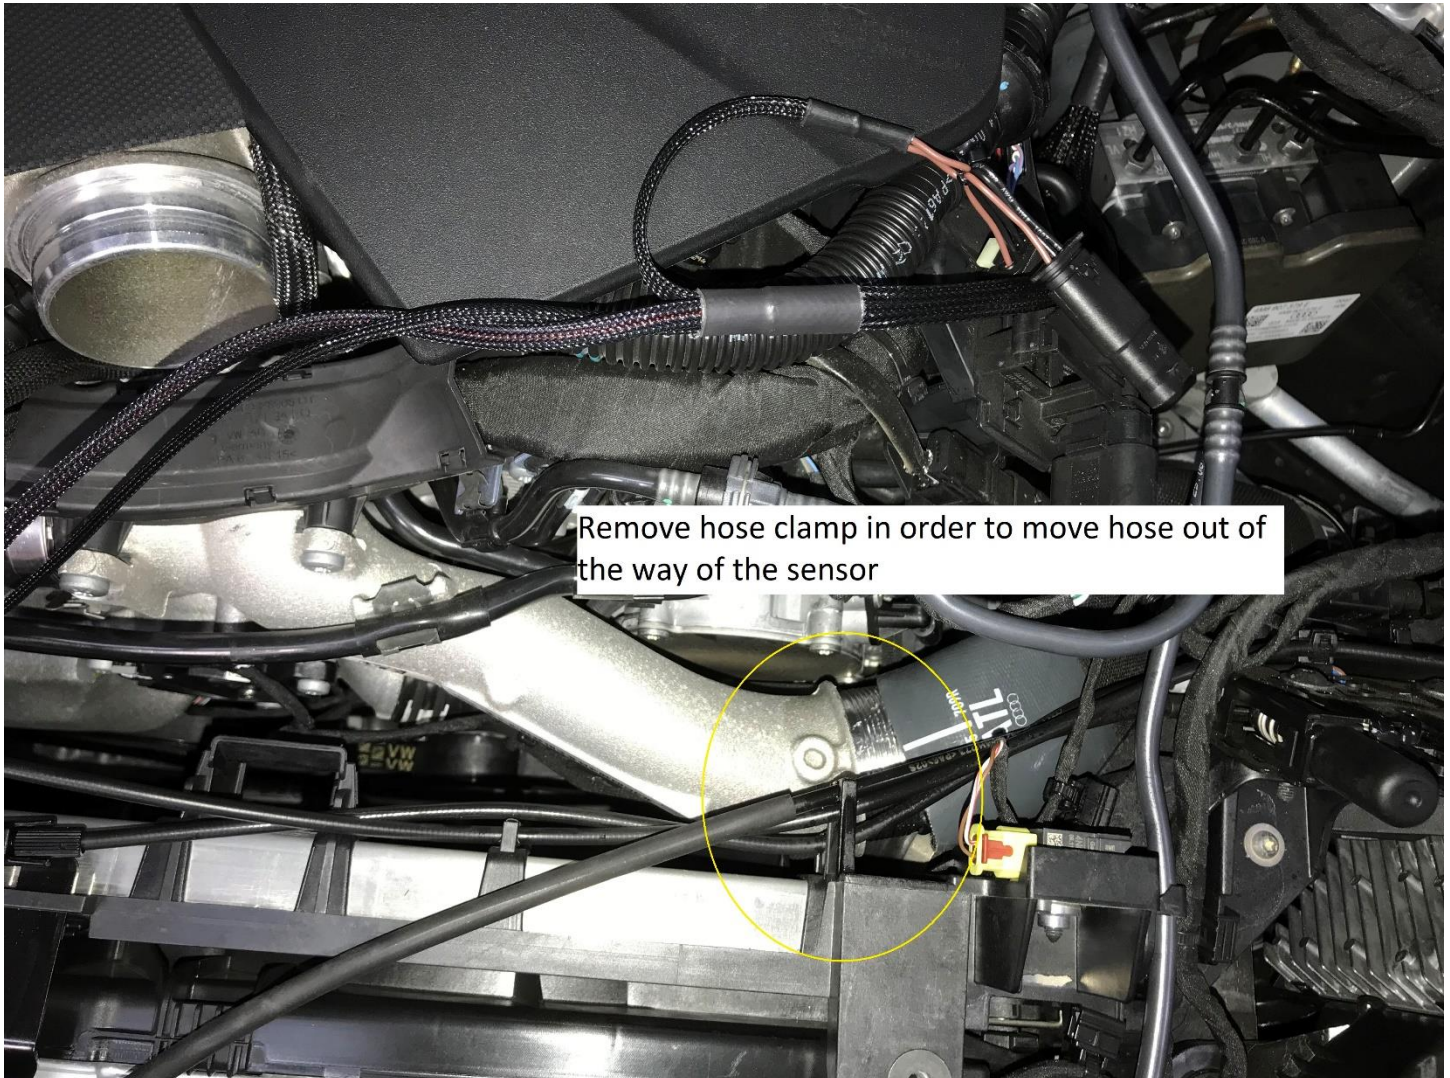


The original plug has a grey locking tab that slide back. You press down on it once unlocked and the plug will unclip. Connect the brown wire plug into the sensor and the original plug into the JB4 harness. Lock the JB4 side sensor into place by pushing the grey locking tab forward.

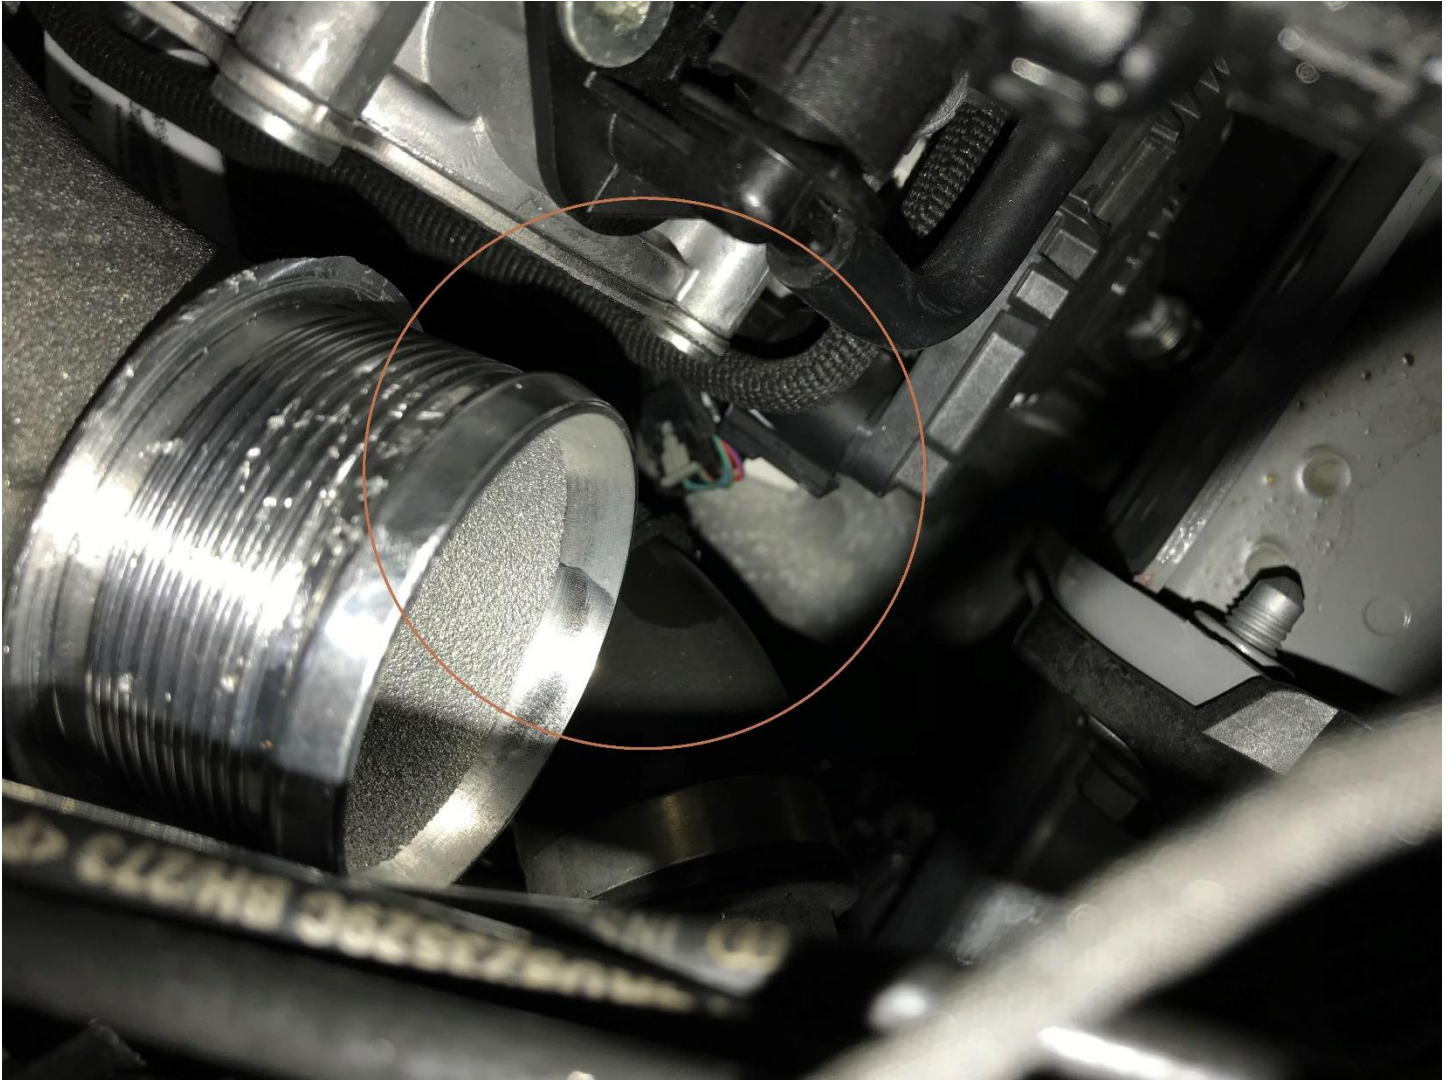




## Sensor C: Purple wired boost sensor plug

This sensor is located in the Left of the engine bay and the plug with the black and purple wires connects to it. To reach it the charge pipe will need to be removed by removing the clamp with a flat screwdriver and pushed out the way. The original plug has a grey locking tab that is slid back and then pressed down to release plug.

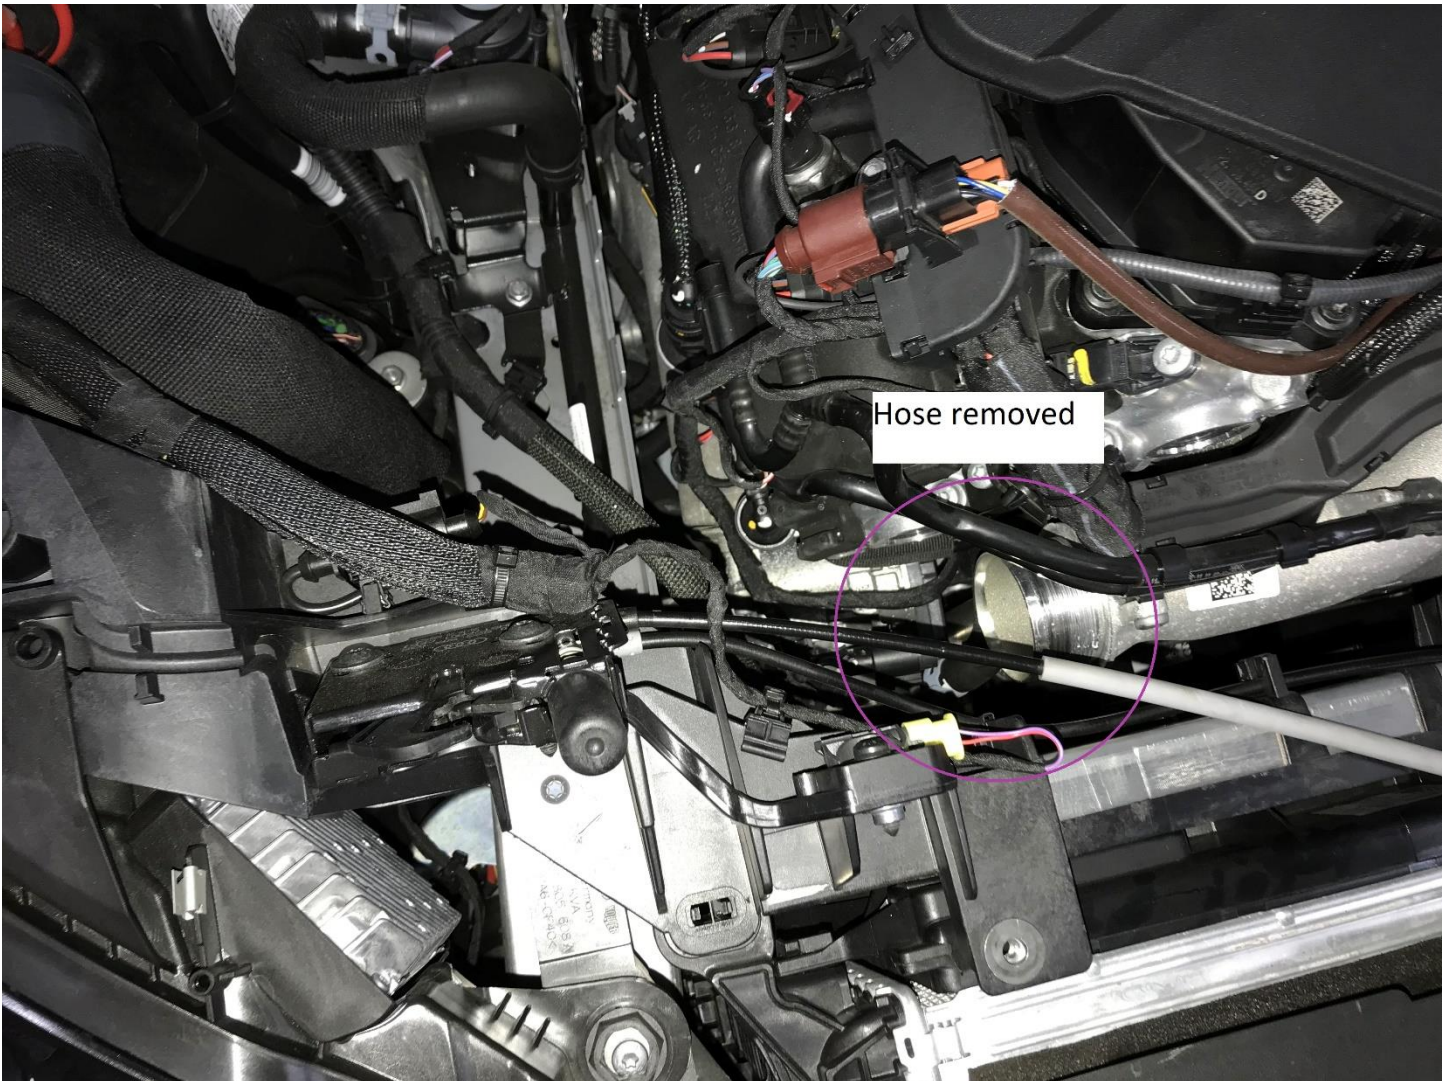




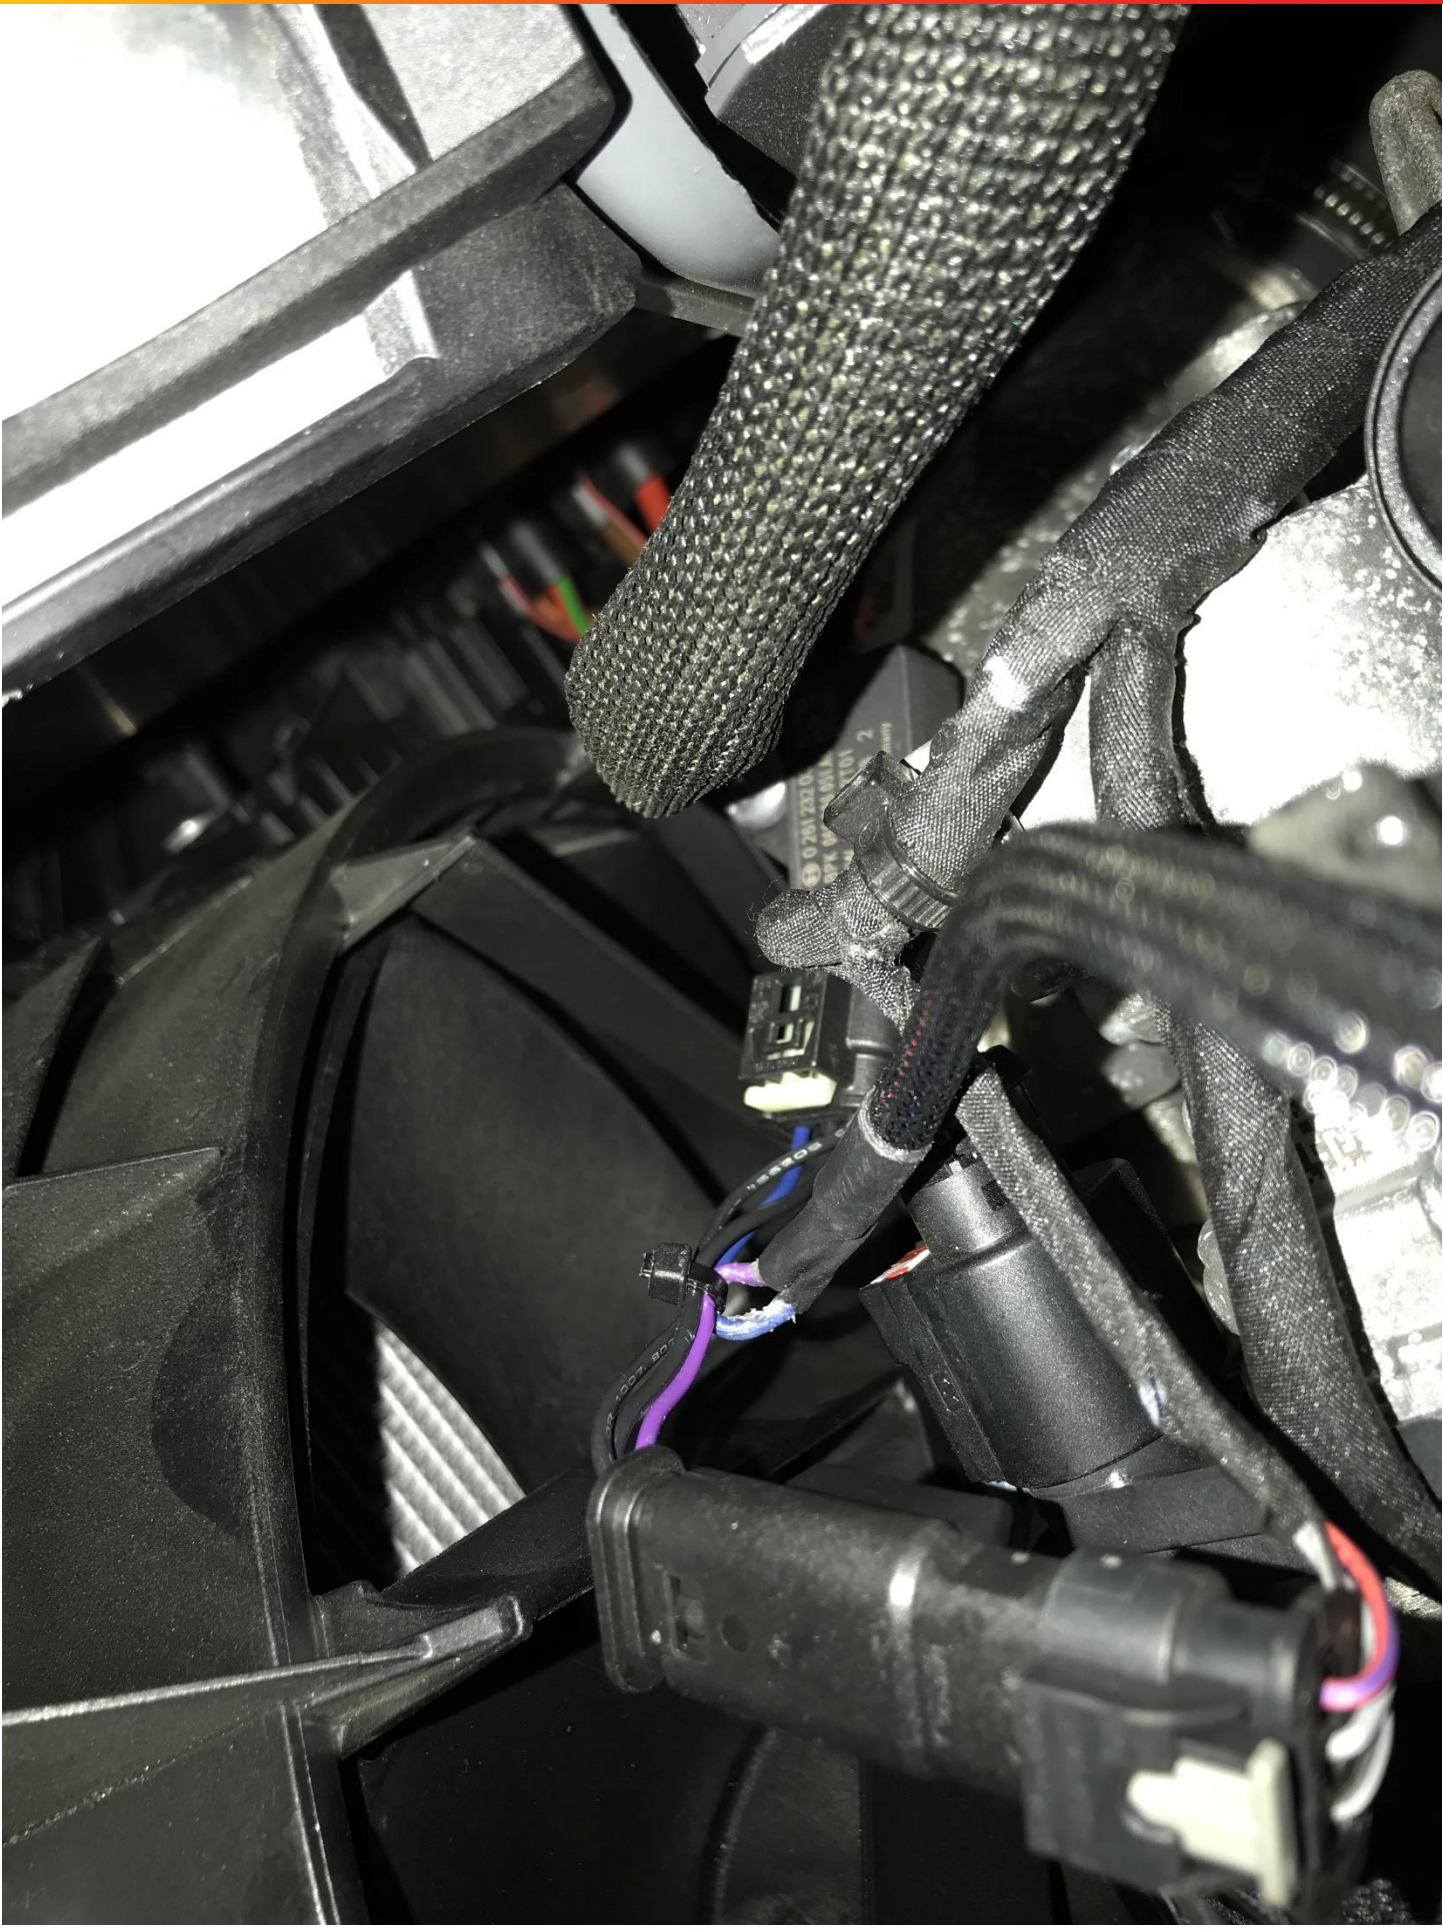

## Sensor D: Green wired boost sensor plug

This sensor is located in the Left of the engine bay on the intake manifold and the plug with the black and green wires connects to it. It has a red locking tab that is slid back and by pressing down on the tab once unlocked it releases the plug.

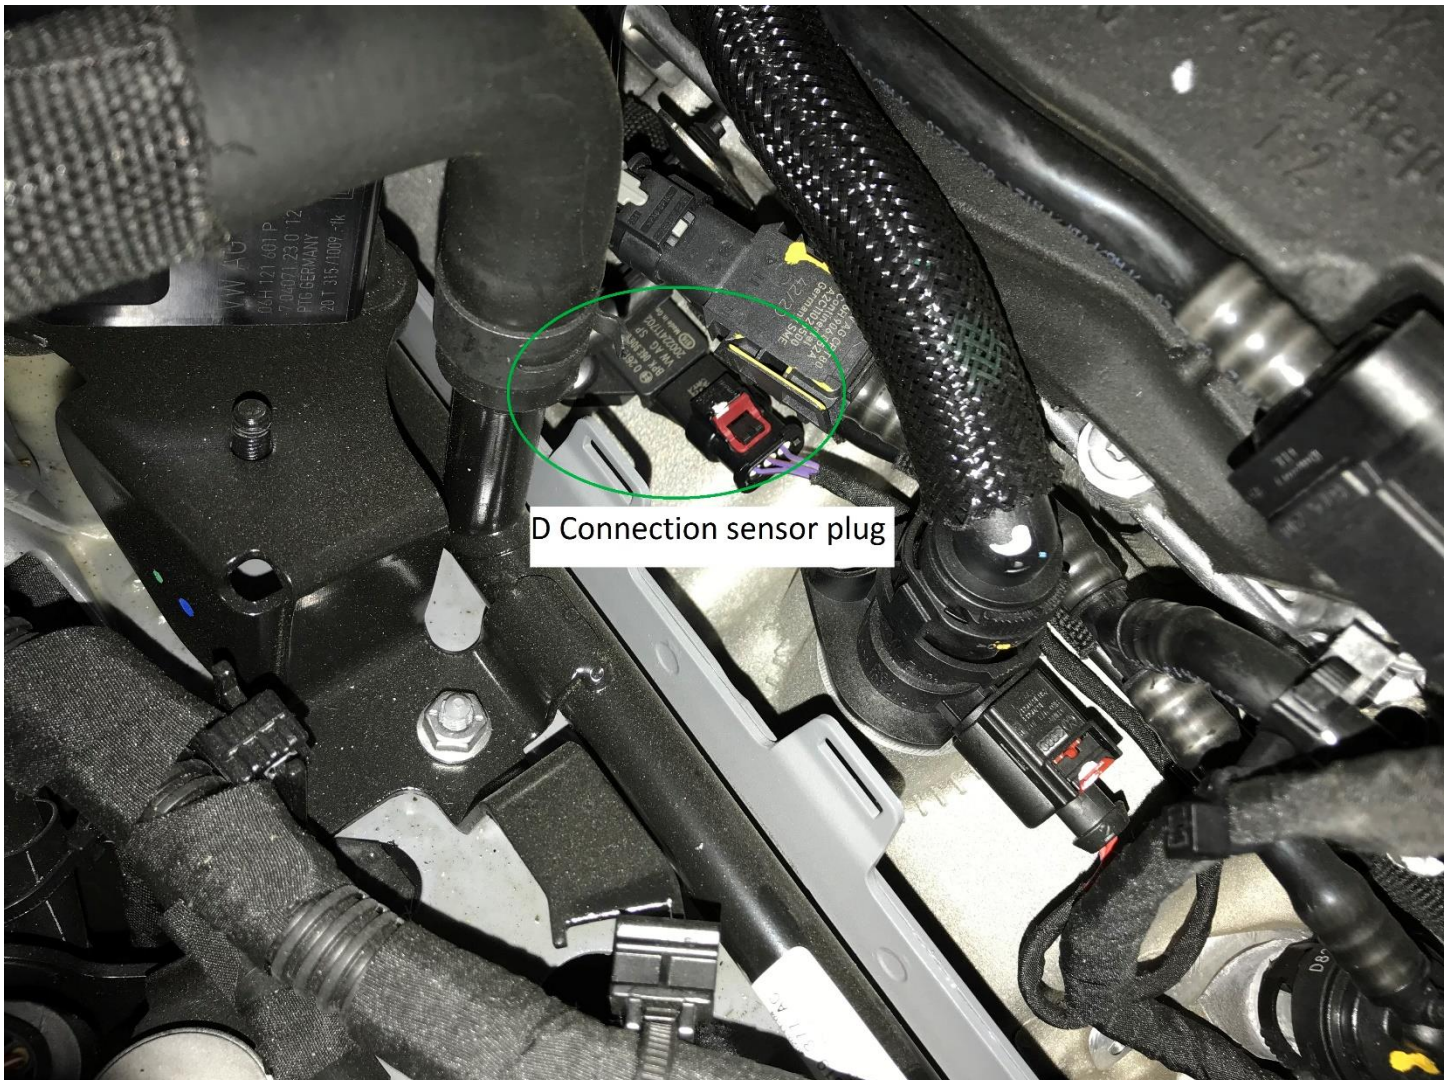


Once the last plug is connected everything can be assembled in reverse order.

The JB4 can be located in the firewall in the below location.



At this stage the car can be unlocked and the OBD data cable can be routed to the inside of the interior. For simplicity of install we have routed via the door stop but a more permanent install can be done via the firewall. (we are evaluating a suitable grommet and will amend the install guide once this procedure is final).

The small end of the OBD cable connects to the JB4 harness as per the below picture.

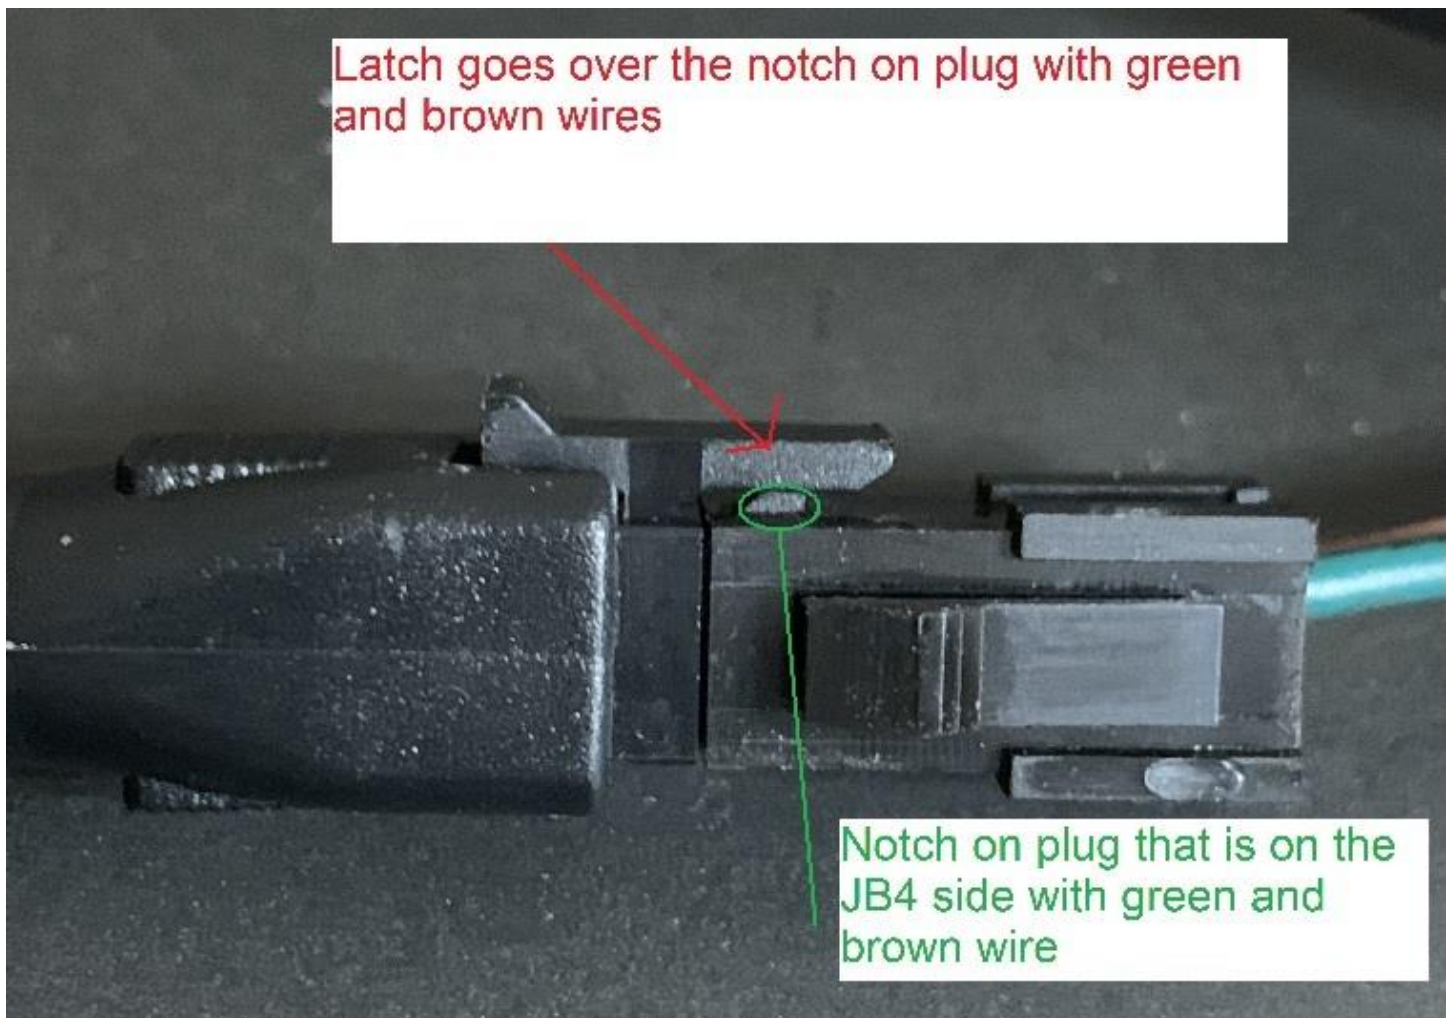









The large end of the OBD cable can be installed into the OBD port found on the drivers side to the left of the steering trim.

At this stage the install is complete. For any install assistance or tuning support email [george@burgertuning.com](mailto:george@burgertuning.com).

If you have opted for the JB4 Connect Kit in the next two pages is a guide on how to install.


## **JB4 Connect Kit (Pinned Power) Install Guide**

04-13-2020

**1) Open the JB4 enclosure.**



**2) Install the DB9 connector and ensure both screws are secure.**

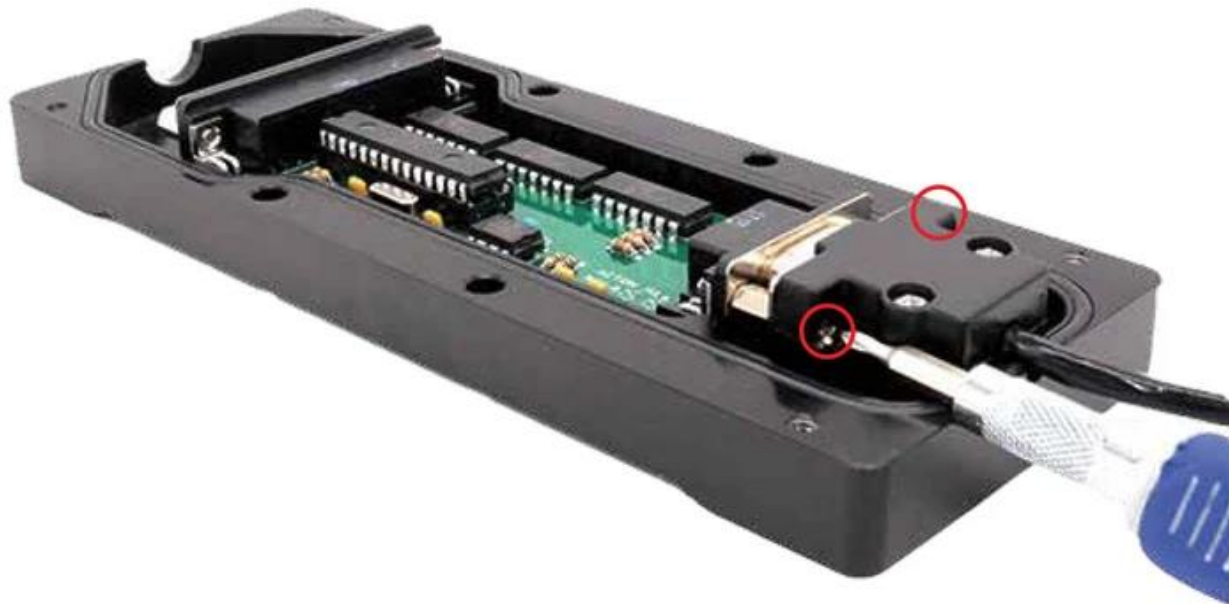

3) Put the JB4 enclosure back together.



**\*\*\*Very Important\*\*\***

4) Ensure the Connect Kit **\*IS NOT\*** in direct contact with the metal JB4 enclosure or any other nearby metal. Aim the smaller side of the Connect Kit (circled below) **DIRECTLY** towards the driver's seat for best signal quality. Failure to do this may lead to connectivity issues.

